



FTH Active Cabinet

25U + 28U, 500 mm DEPTH

GROLLEAU


propose a 25U + 28U aluminium single skin insulated outdoor SRO, 500 mm depth,

For thermal regulation, the cabinet benefits from several devices:

- a 30 mm insulating foam
- 2 air vents with Anti-vandalism cover on the fronts
- 2 ventilators integrated in the roof
- Side air conditioning possible

In addition, there are some specific features to note:

- Reduced mixing zone
- LVTS board outside the 19" areas
- battery bay located into the base

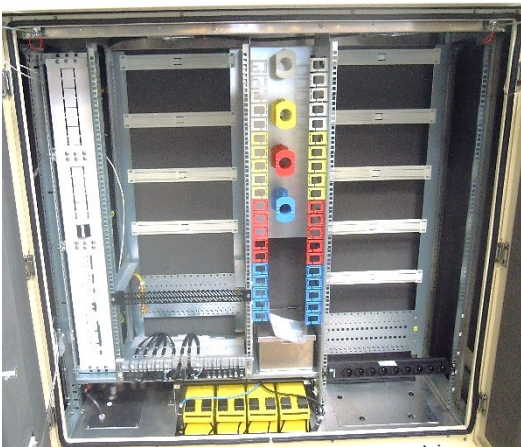

Interior view of a non-equipped cabinet



TECHNICAL SPECIFICATIONS

MECHANICAL CHARACTERISTICS

Overall dimensions	L1600 x H1600 x P500 mm
Weight without equipment	150 kg
Cabinet	SRO single skin 25U + 28U, 500 mm depth
Height of pedestal	200 mm
Operating depth	140 mm between front face, equipment, and door 360 mm for integration of equipment
Opening door	90 and 110° Right Door with retractable handle Left Door with internal lock Automatic door stopper on the top and manual stopper at the bottom

FINITION & PROTECTION

Standard protection	IP 55 IK 10
Painting	10 standard textured RAL colours
Floor fixation	6 points accessible from the inside of cabinet M10 screws & washers delivered with cabinet
Hinges & bolts	Stainless steel
Heat management	Fans or cooler
Locking option	G'ACCESS



GROLLEAU

135 Chemin du Moulin de la Buie - 49310 MONTILLIERS - FRANCE

Tel : 33 (0) 2 41 75 88 22

Email : info@grolleau.fr - Web : www.grolleau.fr